

**CCF3D**  
THREE-SHOT TYPE FUSE CUTOUTS  
FOR USE IN NORMAL AND HIGH POLLUTED AREAS



# CCF3D

## THREE-SHOT TYPE FUSE CUTOUTS FOR USE IN NORMAL AND HIGH POLLUTED AREAS

This is a three cutouts arrangement in one phase with the same characteristics that our fuse cutout offers, but this one also counts with a new and smart three-shot system that reduces significantly the need of reestablishing circuit whenever a failure occurs, ideal in remote or difficult access area.

Since the fuse holder is not different to any regular cutout is compatible with any other brand.

FOR NORMAL USE			
CATALOGUE NUMBER	MUL15-3D	MUL27-3D	MUL38-3D
MAX. DESIGN VOLTAGE KV	15	27	38
NOMINAL CURRENT A	100	100	100
INTERRUPT CAPACITY ASYMETRIC KA	12	12	5
B.I.L. KV	110	150	200
LEAKAGE DISTANCE MM	215	450	700
ARCING DISTANCE (A) MM	274	293	317
DISTANCE (L) MM	507	642	835
NET WEIGHT KG	27,500	38,400	48,600
GROSS WEIGHT KG	35,500	46,600	57,000

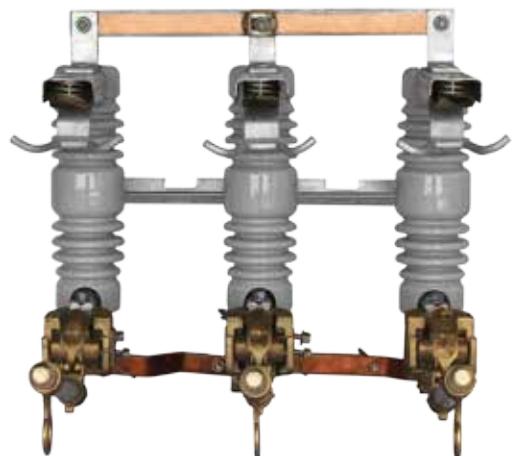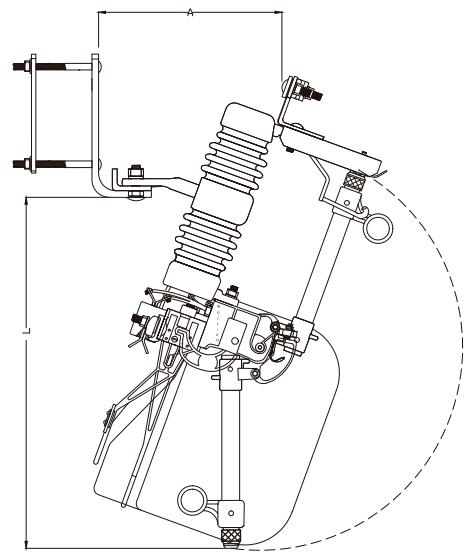

FOR MORE INFORMATION:



Please visit our website

**WWW.MULTICO.COM.MX**